

SOLE SOLAR

GREEN ENERGY ADVOCATES

345—380W

Solar panel with 120cells 166MM solar cells



Product Feature



9 Busbar Solar Cell

9 busbar solar cell adopts new technology to improve the efficiency of modules



High Voltage

UL and IEC 1500V certified; lowers BOS costs and yields better LCOE



High Efficiency

Higher module conversion efficiency (up to 20.37%) benefit from half cell structure (low resistance characteristic)



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment




Durability of extreme conditions

High salt mist and ammonia resistance certified by TÜV NORD



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).

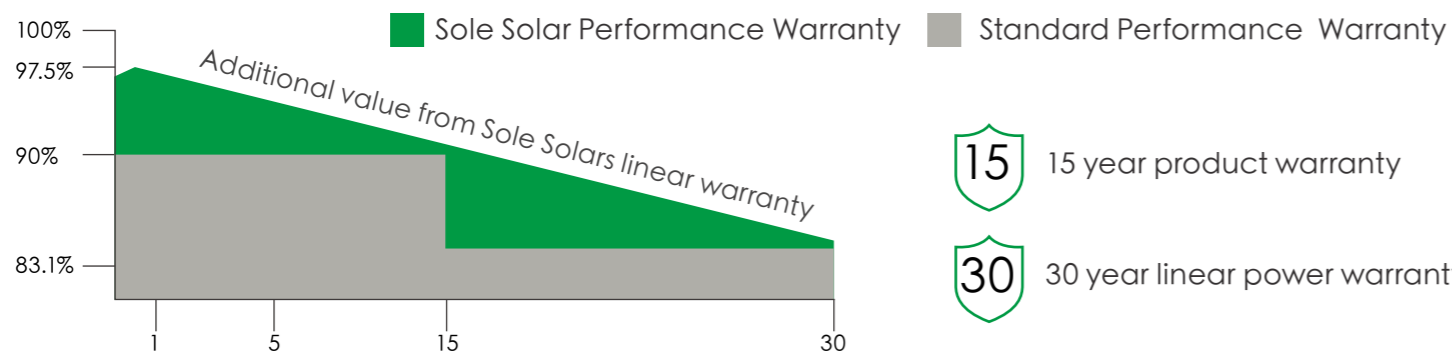

15 15 year product warranty

30 30 year linear power warranty

<https://www.solesolarpv.com/>




Mono Crystalline Essential Parameter (STC 1000W/M² Cell Temperature 25°C AM=1.5)

Model Type	SS345S7	SS350S7	SS360S7	SS370S7	SS380S7
Power(w)	345	350	360	370	380
Number of Cells	120 (6*20)	120 (6*20)	120 (6*20)	120 (6*20)	120 (6*20)
Dimensions(MM)	1755*1038*35	1755*1038*35	1755*1038*35	1755*1038*35	1755*1038*35
Weight(KG)	19.5	19.5	19.5	19.5	19.5
Vmp(v)	33.0	33.5	34.0	34.4	34.8
Imp (A)	10.46	10.45	10.60	10.77	10.92
Voc(v)	40.0	40.2	40.6	41.1	41.6
Isc(A)	10.99	11.19	11.53	11.70	11.85
Module Efficiency	18.9%	19.2%	19.7%	20.3%	20.8%

Mono Crystalline Essential Parameter (NOCT 800W/M² Ambient Temperature 20°C AM=1.5)

Model Type	SS345S7	SS350S7	SS360S7	SS370S7	SS380S7
Power(w)	265.04	268.88	276.56	284.25	291.93
Number of Cells	120 (6*20)	120 (6*20)	120 (6*20)	120 (6*20)	120 (6*20)
Dimensions(MM)	1755*1038*35	1755*1038*35	1755*1038*35	1755*1038*35	1755*1038*35
Weight(KG)	19.5	19.5	19.5	19.5	19.5
Vmp(v)	30.06	30.54	30.96	31.31	31.72
Imp (A)	8.82	8.80	8.93	9.08	9.20
Voc(v)	36.91	37.07	37.46	37.89	38.36
Isc(A)	9.34	9.51	9.80	9.95	10.07
Module Efficiency	18.9%	19.2%	19.7%	20.3%	20.8%

Mechanical Drawings

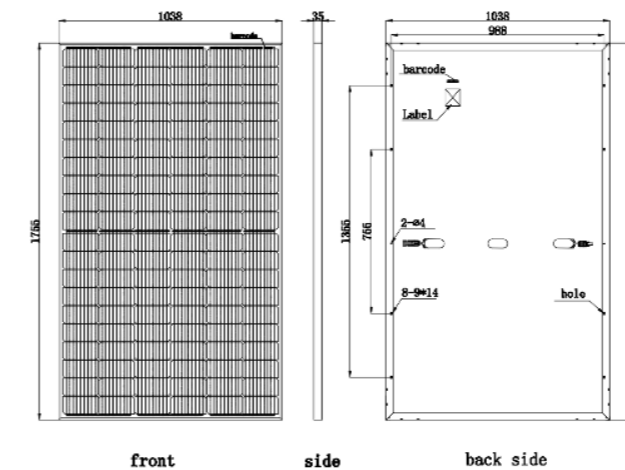

Temperature Rating

Rated battery operating temperature	45±2°C
Maximum power temperature coefficient	-0.4%/°C
Open circuit voltage temperature coefficient	-0.29%/°C
Short circuit current temperature coefficient	-0.05%/°C

Limit parameter

Operating temperature	-40-+85°C
Maximum system voltage	1000/1500VDC
Maximum fuse rated current	20A

Mechanical Characteristics

Front	Glass 3.2mm tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68 rated
Connectors	MC4 compatible

Packing Configuration

Container	20GP	40GP
Pallets per container	12	26
Pieces per container	342-366	858

CONTACT INFORMATION

E-mail: info@solesolarpv.com

Address: 6/F, Fulin Building, No. 6297 Bao'an Avenue, Fuhai Street, Baoan District, Shenzhen, China.

Tel: 0086-0755-23088748

CONTACT US!

<https://www.solesolarpv.com/>